


DMM-1100MF Main Chassis

- Standard 4 RU chassis with 8 slots for functional modules and 2 slots for Power Supplies
- Hot-backup power supply unit
- Intelligent cooling system with temperature sensor
- Wall mounted or Rack mounted
- Compatible with new successive modules
- Power Supply: AC 90V-250V, 150Watts, 50-60Hz
- Optional Build-in IP Switch
- Dimension: L=340mm, W=483mm, H=178mm (4U)
- Operating temperature: 0 ~ 45°C (for all modules)
- Storage temperature: -10 ~ 60°C (for all modules)

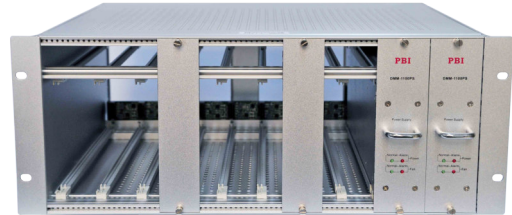

DMM-210MF Main Chassis

- Standard 1 RU chassis with 2 slots for functional modules
- 1 power supply
- Intelligent cooling system with temperature sensor
- Wall mounted or Rack mounted
- Compatible with new successive modules
- Power Supply: AC 90V-250V, 150Watts, 50-60Hz
- Dimension: L=340mm, W=483mm, H=44.5mm (1U)
- Operating temperature: 0 ~ 45°C (for all modules)
- Storage temperature: -10 ~ 60°C (for all modules)



DMM-1000CU Programmer Unit

- 2×20 LCD display screen and 6-key keypad
- No external power nor battery needed
- Easy and quick on site system configuration without PC
- Compatible with new modules
- Dimension 170×70×22 mm

